


# LOERAKKER LED LINE



Luminaires for Hunter Douglas Ceilings

seamless integration • wide choice  
sustainable luminaires • co-creation & custom solutions

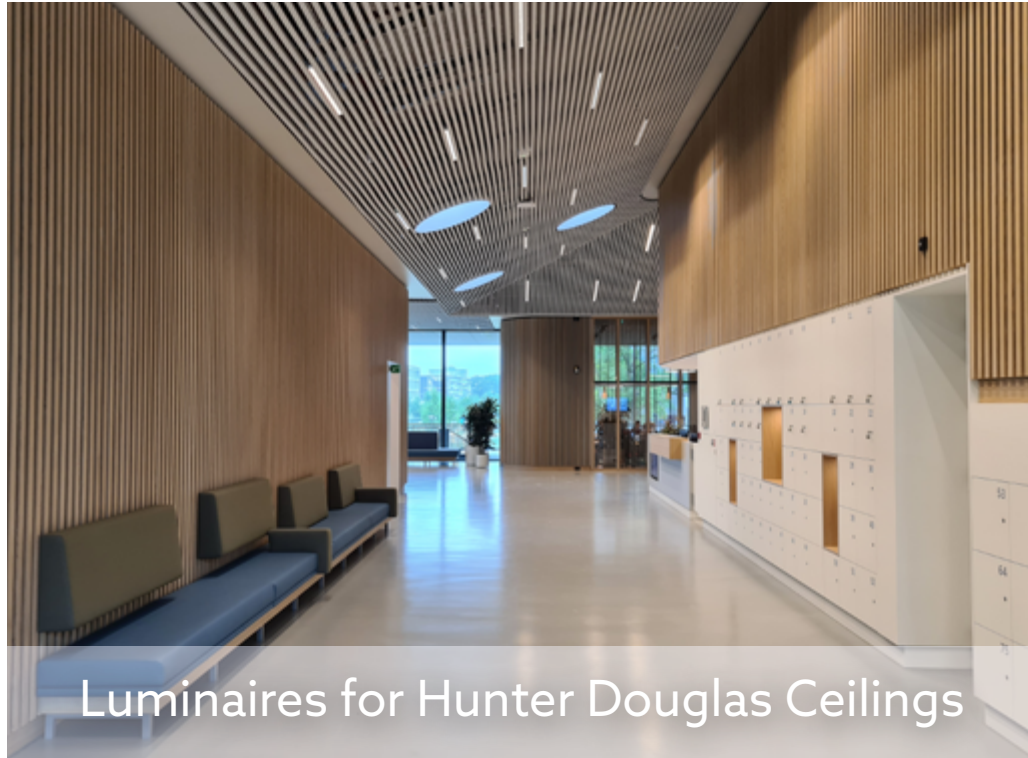

made  
in  
Holland

# L14 linear luminaires for HeartFelt® & Luxalon®

Luminaires for elegant, seamless integration in Hunter Douglas Interior Ceilings. Unlike other luminaires, these luminaires are mounted between or instead of the ceiling panels using innovative brackets. This results in a completely seamless appearance. In addition, installation is simple.




## Playing with options

The luminaires are available in 3 widths (20, 30 and 40 mm) and are mounted between the ceiling panels. The 40 mm luminaire can also be installed instead of a panel, allowing for clean and playful designs. With a choice of prism or reflector, there are plenty of options for offices and general areas. The new UGR >20 prism also offers an attractive alternative for both applications thanks to the continuous light line.

The luminaires are available as standard in 6 lengths and can be seamlessly connected for endless elegant ceiling lighting. All possible options are also available in terms of light output and colour.


- Seamless integration in Hunter Douglas ceiling systems

Various lengths, connectable into continuous light lines

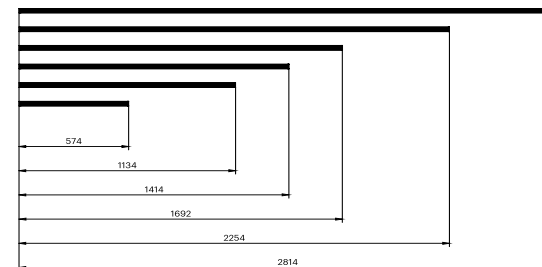


## L14 spotlight for Hunter Douglas HeartFelt®

The L14-D40, specially developed for HeartFelt® ceilings, is mounted not inside the panel but as an integrated part of a panel, unlike other spotlights. This ensures an optimal lumen per watt ratio. The spotlight is powder-coated in exactly the same colour as the HeartFelt® panels, resulting in seamless visual integration.

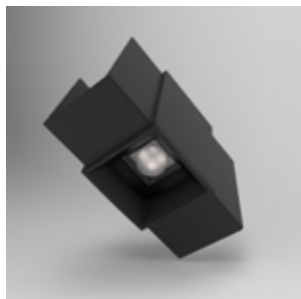

### ■ Most efficient spotlight lighting

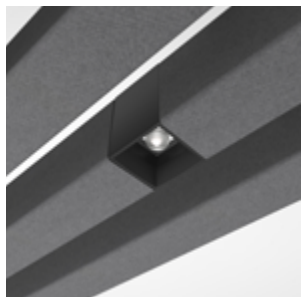

#### Cost-efficient installation

For installation, there is a choice of a mini-driver per luminaire or a central 'plug & play' solution suitable for up to 10 luminaires.

#### Sustainable and smart

The luminaires are made of aluminium and are available in matching HeartFelt® colours. They consist of 40% recycled aluminium, can be used circularly and are produced in the Netherlands. The luminaires are optionally available in a smart version.

#### Specifications


- High-quality Fortimo LEDs
- Light colours 830, 840, 850, 930 and 940
- Long lifetime > 80,000 hours
- High energy efficiency 130-165 lm/W
- Prismatic or reflector (low UGR)
- Optional integrated emergency lighting
- Optional DALI control
- Optional wireless dimming and sensing
- Halogen-free CCA wiring

## Sustainable spotlight lighting

These recessed spotlights have been specially developed for Derako® ceilings by Hunter Douglas and integrate seamlessly – without interrupted carriers or additional accessories. The appearance is luxurious and perfectly matches the warm, natural look of solid wood ceilings. In terms of finish: choice of round or square, black, white or dark optic reflector and colour temperatures of 2700K, 3000K or 4000K. In short: all the flexibility and freedom to perfectly illuminate your interior design.

### Specifications

- Philips Xitanium driver
- Black, white or dark optic reflector
- 2700K, 3000K and 4000K
- Dimmable

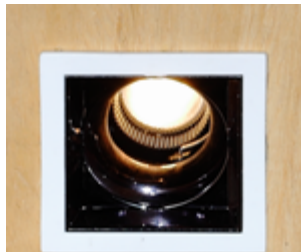

## Integrated lighting for Hunter Douglas Derako®

### Specifications

- Philips Xitanium driver
- 3000K and 4000K
- UGR <19 suitable for offices
- Dimmable

### ■ Linear luminaire clicks seamlessly into ceiling



An innovation by Loerakker: instead of a pendant luminaire, there is now also the option to seamlessly mount these L14 luminaires in the installation slots of Derako® ceiling panels. In this way, a luminaire replaces a ceiling plank. The visual result is always highly refined. In addition, installation is extremely simple.

### Stock and variations

These luminaires are available in white and black, standard 92 mm wide and 1500 mm long. These dimensions were chosen because they are the most popular sizes. Do you have other ideas for your project? [Contact](#) us – we are happy to think along. Because we produce in the Netherlands, we can act quickly and respond flexibly to non-standard colours and dimensions.

## Specifications

- 48V power rail
- Lengths 1, 2, 3 metres (and connectable)
- Light colour 3000K
- Black version, white and grey optional

# Track rail system for Hunter Douglas Interior Ceilings


Flexible use as main or supplementary lighting: linear luminaires, spotlights and pendant luminaires in a smart track rail system. The power rail fits perfectly between the panels of Hunter Douglas ceilings and is installed directly during ceiling installation. The system is easy to mount on any Hunter Douglas carrier, regardless of whether the ceiling is made of wood, felt or aluminium. The linear luminaires click magnetically into the rail and align completely flush with the panels, ensuring a clean and stylish finish.

## Variations

In addition to the four linear luminaires, there is a choice of two spotlights and three different pendant luminaires. Do you have something else in mind? [Contact](#) Loerakker LED Line. The luminaire range can be expanded, or we are happy to assist with custom solutions.



■ Competitive solution with maximum versatility

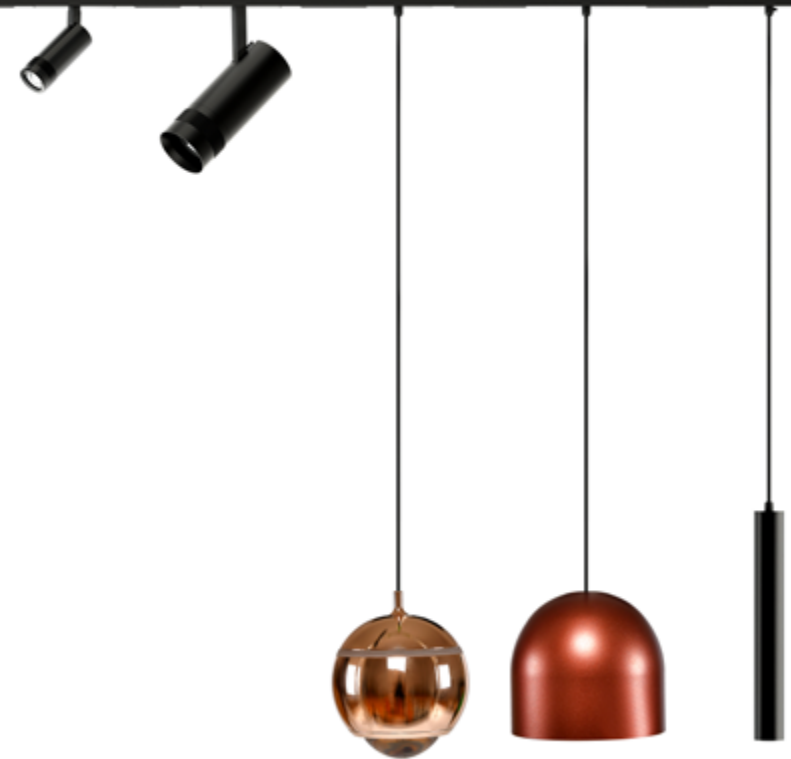


Omnia Wageningen University



*Hunter Douglas HeartFelt®  
277 units L14-40-1134mm with reflector  
Xitanium DALI drivers with GST18i5 connection  
Special finish RAL 9003  
Panel height 80mm  
Supplied via Wolfs Verlichting*

FC Lisse

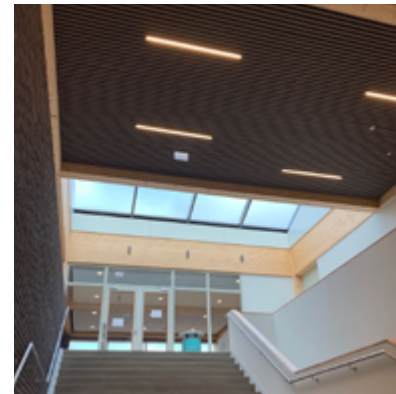

*Hunter Douglas HeartFelt®  
L14-30 in 3 different lengths:  
2 units 574mm  
18 units 1134mm  
19 units 1414mm  
Central driverbox, DALI dimmable, 4 units equipped  
with emergency unit  
Installation by Vink - van der Meer Electro BV*

Batopin Belgium



Hunter Douglas HeartFelt®  
L14-40 with brackets for panel height 105mm  
31 units 574mm  
295 units 1134mm  
900 units 1694mm  
900 units 2254mm  
121 units 2814mm

Theater De Krocht Zandvoort



Hunter Douglas Derako®  
11 units L14-9150  
92 x 1500 mm  
RAL 9016  
UGR <19  
Prismatic diffuser, evenly illuminated  
Seamless connection  
Driver per luminaire

CODA




*Hunter Douglas HeartFelt®  
63 units L14-30 between the panels  
Central driverbox with DALI and GST18i5  
8 units L2 luminaires, suspended, length 2.8 m  
Interior design by Klaaysen Design*



*Hunter Douglas HeartFelt®  
L14-40  
32 units 1134mm  
2 units 574mm  
Installation by Intermontage*

Wraptor Nootdorp

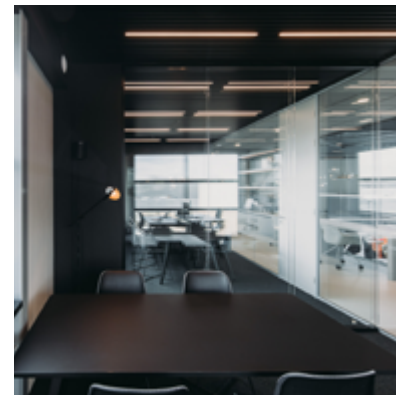


*Hunter Douglas Luxalon®  
L14-30  
20 units 1134mm  
2 units 1414mm  
Design InterArc*

Bicycle shed Rotterdam







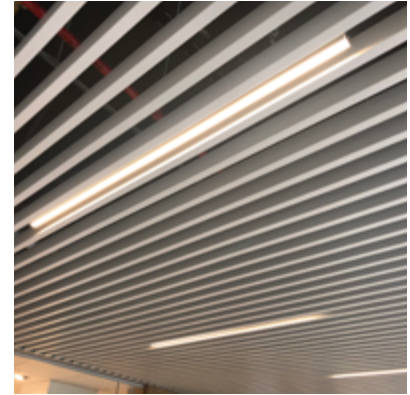





*Hunter Douglas HeartFelt®  
L14-40 in line with the panel  
99 units 1134mm  
Central driverbox with Zigbee dimmable drivers  
21 wireless Zigbee sensors  
Installation ByMJ  
Ceiling contractor Bovero*









Bisonspoor Maarsssen



*Hunter Douglas Luxalon®  
L14-30 grey anodised  
Central driverboxes with DALI and GST18i5  
632 units 1414mm  
Installation Terberg Totaal Installaties  
13 units 1414mm  
8 units 574mm  
Installation De Rijk & Van Dorp Elektrotechniek*

# Hunter Douglas Architectural luminaires

Linear luminaire Spots		Ceiling type				Colour options	Download
		HeartFelt®	Luxalon®	Derako® Lineair	Derako® Grill		
	L14-20	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="radio"/> <input checked="" type="radio"/>	<a href="#">· Specifications</a> <a href="#">· Dialux file</a> <a href="#">· Datasheet</a>
	L14-30	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="radio"/> <input checked="" type="radio"/>	<a href="#">· Specifications</a> <a href="#">· Dialux file</a> <a href="#">· Datasheet</a>
	L14-R-30	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="radio"/> <input checked="" type="radio"/>	<a href="#">· Specifications</a> <a href="#">· Dialux file</a> <a href="#">· Datasheet</a>
	L14-40	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="radio"/> <input checked="" type="radio"/>	<a href="#">· Specifications</a> <a href="#">· Dialux file</a> <a href="#">· Datasheet</a>
	L14-R-40	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="radio"/> <input checked="" type="radio"/>	<a href="#">· Specifications</a> <a href="#">· Dialux file</a> <a href="#">· Datasheet</a>
	L14-9150		<input checked="" type="checkbox"/>			<input type="radio"/> <input checked="" type="radio"/>	<a href="#">· Specifications</a> <a href="#">· Dialux file</a> <a href="#">· Datasheet</a>
	L3-62-RI		<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="radio"/> <input checked="" type="radio"/>	<a href="#">· Specifications</a> <a href="#">· Dialux file</a> <a href="#">· Datasheet</a>
	L3-62-SI		<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	<input type="radio"/> <input checked="" type="radio"/>	<a href="#">· Specifications</a> <a href="#">· Dialux file</a> <a href="#">· Datasheet</a>
	L3-65	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="radio"/> <input checked="" type="radio"/>	<a href="#">· Specifications</a> <a href="#">· Dialux file</a> <a href="#">· Datasheet</a>
	L14-D40	<input checked="" type="checkbox"/>				<input type="radio"/> <input type="radio"/> <input checked="" type="radio"/>	<a href="#">· Specifications</a> <a href="#">· Dialux file</a> <a href="#">· Datasheet</a>


Track rail fixture		Ceiling type				Colour options	Download
		HeartFelt®	Luxalon®	Derako® Lineair	Derako® Grill		
	L14-TR-04-LP	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="radio"/>	<a href="#">· Dialux file</a> <a href="#">· Datasheet</a>
	L14-TR-04-LR	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="radio"/>	<a href="#">· Dialux file</a> <a href="#">· Datasheet</a>
	L14-TR-02-SP27	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/>	<a href="#">· Dialux file</a> <a href="#">· Datasheet</a>
	L14-TR-02-SP39	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/>	<a href="#">· Dialux file</a> <a href="#">· Datasheet</a>
	L14-TR-03-HL15	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="radio"/> <input type="radio"/>	<a href="#">· Dialux file</a> <a href="#">· Datasheet</a>
	L14-TR-03-HL38	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/> <input type="radio"/>	<a href="#">· Dialux file</a> <a href="#">· Datasheet</a>
	L14-TR-03-HL48	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="radio"/> <input type="radio"/>	<a href="#">· Dialux file</a> <a href="#">· Datasheet</a>
	L14-TR-01-RL3	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="radio"/>	<a href="#">· Dialux file</a> <a href="#">· Datasheet</a>




HeartFelt®



Luxalon®



Derako® Lineair



Derako® Grill

# LOERAKKER LED LINE



[LOERAKKERLEDLINE.NL](http://LOERAKKERLEDLINE.NL)



Loerakker Lighting, Stettinweg 7, 3825 PL Amersfoort. +31 33 47 66 445

